
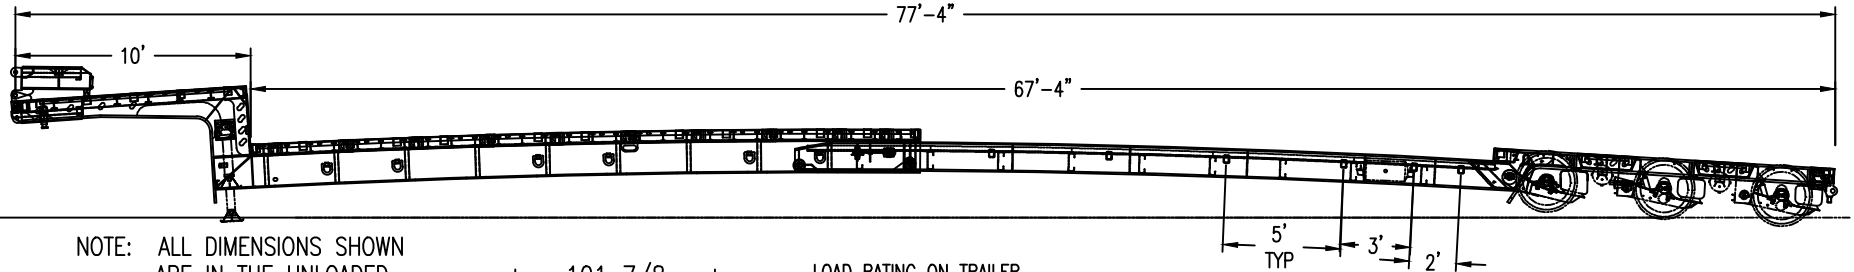



TRAILER OPTIONS

- 1-1/8" APITONG FLUSH DECKING
- STAKE POCKETS ON 24" CTRS
- 5/16" X 2" RUB RAIL
- DOUBLE PIPE SPOOLS
- 2 SPEED LANDING GEAR HANDLE ON CURBSIDE
- 36" FLIP NECK
- BRKTS, AIR, ELEC FOR 36" FLIP NECK
- REMOVABLE KING PIN
- 30" LOADED DECK HEIGHT
- 4" JR-IBEAMS ON 12" CENTERS
- 6 PR FLAT D-RINGS ON MAIN BEAM WEB 1/2 WAY UP
- 10 PR DROP DOWN D-RINGS
- 1-3/8" RAISED APITONG DECKING
- 4S2M ABS WITH SPRING BRAKES ON 2 AXLES
- 245/70R/17.5 TIRES MICHELIN
- POLISHED ALUMINUM WHEELS OUTSIDE
- STEEL WHEELS INSIDE
- 3 TAIL LIGHT PACKAGE
- OPEN WHEELS
- PAINT: BLACK
- LED LIGHTING
- RAISE & LOWER VALVE
- LIQUID FILLED AIR GAUGE
- 4" STROBE FOR 3RD TAIL LIGHT
- MANUAL RIDE HEIGHT CONTROL
- FRAME REINF., AIR, BRACKETS, ELEC FOR SINGLE AXLE BOOSTER
- 4-WAY PLUG AT REAR
- CHAIN UP ON 1ST AXLE W/DUAL RIDE HEIGHTS
- PSI TIRE INFLATION SYSTEM

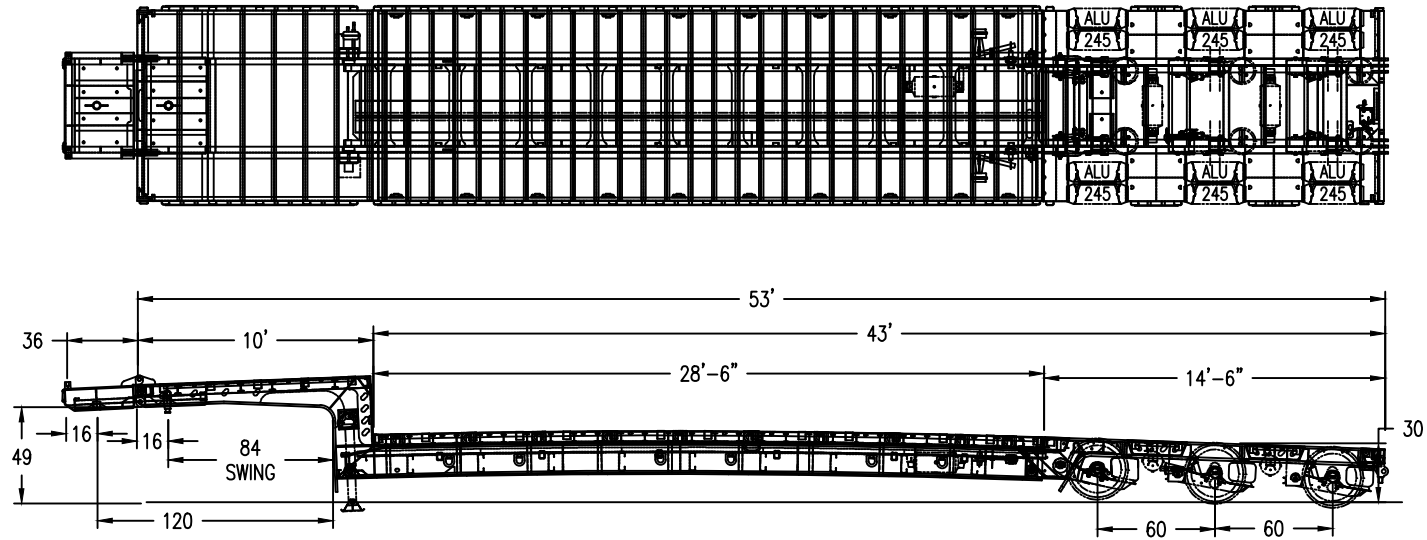

NOTE: ALL DIMENSIONS SHOWN ARE IN THE UNLOADED CONDITION. DIMENSIONS WILL CHANGE SLIGHTLY DURING MANUFACTURING.

LOAD RATING ON TRAILER
 90,000 LBS DISTRIBUTED
 70,000 LBS IN 10' CONCENTRATED IN THE CENTER OF THE DECK WHEN THE TRAIL IS IN THE CLOSED POSITION



DRAWING APPROVAL

This drawing is forwarded for your approval. Please check all dimensions before signing.

FIRM: _____
 BY: _____
 DATE: _____

XLSPECIALIZED TRAILERS
 1086 South 3rd St. Manchester, IA 52057

Tolerances:
 Holes: ±.010
 Ang. Tol: ±1°
 Dim. Tol: ±.1/16

THIS DRAWING IS THE PROPERTY OF XL SPECIALIZED TRAILERS WHICH CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL DISCLOSED. IT IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY AND MAY NOT BE COPIED OR USED FOR MANUFACTURING OF ANYTHING SHOWN WITHOUT SPECIFIC WRITTEN PERMISSION OF XL SPECIALIZED TRAILERS.

XL 90 SDE PINNACLE TRUCK & TRAILER			
INITIALS	DWG. NO.	JOB NUM.	REV.
JS	Y51276	14670-72	-
SIZE	SCALE	DATE	SHEET OF
D	NTS	5/30/14	1 OF 1
SUSPENSION		TIRES	
HT250US.28		245/70R/17.5	